Robert H. Armon Osmo Hänninen *Editors*

Environmental Indicators



Editors
Robert H. Armon
Civil and Environmental Engineering
Israel Institute of Technology Technion
Haifa, Israel

Osmo Hänninen Department of Physiology Institute of Biomedicine University of Eastern Finland Kuopio, Finland

ISBN 978-94-017-9498-5 ISBN 978-94-017-9499-2 (eBook) DOI 10.1007/978-94-017-9499-2 Springer Dordrecht Heidelberg New York London

Library of Congress Control Number: 2014954799

© Springer Science+Business Media Dordrecht 2015

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed. Exempted from this legal reservation are brief excerpts in connection with reviews or scholarly analysis or material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work. Duplication of this publication or parts thereof is permitted only under the provisions of the Copyright Law of the Publisher's location, in its current version, and permission for use must always be obtained from Springer. Permissions for use may be obtained through RightsLink at the Copyright Clearance Center. Violations are liable to prosecution under the respective Copyright Law.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

While the advice and information in this book are believed to be true and accurate at the date of publication, neither the authors nor the editors nor the publisher can accept any legal responsibility for any errors or omissions that may be made. The publisher makes no warranty, express or implied, with respect to the material contained herein.

Printed on acid-free paper

Springer is part of Springer Science+Business Media (www.springer.com)

Contents

Int	roduction	XXV
	e International Society of Environmental Indicators: storical Overview	xxix
1	Changes in Environment	3
2	<u>-</u>	15
Pa	rt II Climate Change	
3	Environmental Indicators of Climate Change: Phenological Aspects	39
4	Carbon Footprint – An Environmental Sustainability Indicator of Large Scale CO ₂ Sequestration	51
5	Urban Heat Islands	67
6	Tsunami	77

xiv Contents

Par	t III Conservation					
7	Species Extinction Indicators	91				
8	Indicators of Pollinator Decline and Pollen Limitation Yuval Sapir, Achik Dorchin, and Yael Mandelik	103				
9	Coral Bleaching					
10	Invasive Alien Species and Their Indicators	147				
Par	t IV Environmental Degradation					
11	Marine Eutrophication	177				
Par	t V Environmatics					
12	Framework for Analyzing Environmental Indicators Measurements Acquired by Wireless Distributed Sensory Network – Air Pollution Showcase	207				
13	Environment Benefits Quantification Through Statistical Indicators	225				
Par	t VI Intensive Farming					
14	Environmental Indicators of Dryland	239				
15	Pesticide Drift: Seeking Reliable Environmental Indicators of Exposure Assessment	251				
Par	t VII Land Degradation					
16	Environmental Indicators of Land Cover, Land Use, and Landscape Change	265				

Contents xv

17	Desertification and Desertification Indicators Classification (DPSIR)					
Par	rt VIII Soil					
18	Soil Conservation	293				
19	Soil Erosion	307				
20	Soil Salination Indicators	319				
21	Soil Contamination by Diffuse Inputs	331				
22	Markers, Indicators of Soil Pollution	343				
23	Landsnail for Ecotoxicological Assessment of Chemicals and Soil Contamination – Ecotoxicological Assessment of Chemicals and Contaminated Soils Using the Terrestrial Snail, <i>Helix aspersa</i> , at Various Stage of Its Life Cycle: A Review	365				
Par	t IX Land Use					
24	Land Use Changes and Landscape Degradation in Central and Eastern Europe in the Last Decades: Epigeic Invertebrates as Bioindicators of Landscape Changes	395				
25	Environmental Indicators of Biological Urbanization Anders Pape Møller	421				
Par	t X Environmental Pollution					
26	Environmental Impact of the Coal Industry and Resource Equivalency Method for Environmental Damage with Ecological Indicators	435				
27	Environmental Quality Assessment: Geoenvironmental Indices	461				

xvi Contents

28	Nonpoint Source Pollution: Assessment and Management of Environmental Quality According to Geoenvironmental Indices	479
29	Point Source Pollution Indicators	495
30	Noise Pollution Indicators	501
31	Snow Samples as Markers of Air Pollution in Mass Spectrometry Analysis	515
Par	t XI Water Pollution	
32	Marine Pollution-Environmental Indicators in Marine Meiofauna from Brazil Patrícia Pinheiro Beck Eichler, Beatriz Beck Eichler, and Helenice Vital	545
33	Environmental Impacts of Reservoirs	561
Par	t XII Water Biological Pollution	
34	Bacteriological Indications of Human Activities	
	in the Ecosystems	579
35	Indicators of Waterborne Viruses	613
36	Algal Bloom Indicators	633
37	Biological Indicators of Water Quality: The Role of Fish and Macroinvertebrates as Indicators of Water Quality Eugenia López-López and Jacinto Elías Sedeño-Díaz	643
38	Histopathological Indicators in Fish for Assessing Environmental Stress	663
39	Risk Management During Effluent Application for Irrigation Gideon Oron, Laura Alcalde-Sanz, Leonid Gillerman, Yossi Manor, Amos Bick, and Miquel Salgot	677

Contents xviii

40	Molecular Bioindicators of Pollution in Fish					
Par	t XIII Water Chemical Pollution					
41	Ocean Acidification and Related Indicators	723				
42	Mercury in Fish: History, Sources, Pathways, Effects, and Indicator Usage					
43	The Chronic POEDCs Ecotoxicological Impact: An Aquatic Environmental Indicator of Surface and Groundwater					
44	Bioaccumulation and Long-Term Monitoring in Freshwater Ecosystems – Knowledge Gained from 20 Years of Zebra Mussel Analysis by the German Environmental Specimen Bank	781				
45	Viability and Reliability of Dense Membranes in Removing Trace Organic Contaminants for Wastewater Reclamation and Purification: Pros and Cons, Mechanisms, and Trends Shirra Gur-Reznik and Carlos G. Dosoretz	805				
Par	t XIV Air Pollution					
46	Indoor Air Quality Indicators	827				
Par	t XV Environmental Health					
47	Environmental Burden of Diseases	845				
48	Textile Toxicants in Environmental and Human Health Kaisa Klemola	859				
49	Biological Indicators of Ionizing Radiation in Nature Anders Pape Møller and Timothy Alexander Mousseau	871				
50	Health-Related Indicators of Outdoor Air Quality Paul T.J. Scheepers	883				
51	Health Implications of Combustion Engine Exhaust Paul T.J. Scheepers	899				

xviii Contents

52	Health-Related Indicators of Indoor Air Quality	925
53	Human Biological Monitoring and Public Health Paul T.J. Scheepers	945
54	Chemicals Disaster Management and Public Health	967
55	On the Relationships Between Health Outcome and Urban Air Quality	995
56	Electromagnetic Radiation – Environmental Indicators in Our Surroundings	1011
57	Electromagnetic Radiation and Health: Human Indicators Yael Stein, Osmo Hänninen, Paavo Huttunen, Mikko Ahonen, and Reijo Ekman	1025
58	Molds and Radon, Indoors Problems as Indicated by Diseases	1047
Ind	ex	1061

Chapter 12

Framework for Analyzing Environmental Indicators Measurements Acquired by Wireless Distributed Sensory Network – Air Pollution Showcase

Barak Fishbain

Abstract Distributed continuous in situ monitoring of the environment is an essential component in assessing environmental indicators as their changes take place on different spatial and temporal scales. Recent sensory and communication technological developments have led to the emergence of Wireless Distributed Environmental Sensing Networks (WDESNs) that consist mainly of Micro-Sensory-Units (MSUs). The set of skills and expertise that are called for developing these WDESNs are from different fields and research disciplines, where each discipline has its own jargon. To allow cross-disciplinary discussion, a comprehensive, yet simple framework for discussing data acquired by WDESNs is presented. The terminology presented here allows for describing complex multi-modal environmental sensory networks and the integration of the observed environmental indicators' into a holistic understanding of the environment. The usage of the presented framework is demonstrated in describing a recently reported data acquired by air-pollution WDESN.

Keywords Environmental informatics • Distributed sensing

- Sensory networks Environmental sensing Environmental data analysis
- Environmental data fusion

12.1 Introduction

Continuous in situ monitoring of the environment is an essential component in assessing environmental indicators. Air, water and land characteristics and quality, and their change over time is fundamental to most environmental applications. Quantifying changes in environmental indicators over time is a most challenging

Technion Environatics Lab, Department of Environmental, Water and Agricultural Engineering, Faculty of Civil & Environmental Engineering, Technion – Israel Institute of Technology, Haifa 32000, Israel e-mail: fishbain@technion.ac.il

B. Fishbain (⊠)

task as their changes take place on different spatial and temporal scales. Local system characteristics and behavior affect overall system, while system level parameters govern the local scale processes.

Recent sensory and communication technological developments have led to the emergence of Wireless Distributed Environmental Sensing Networks (WDESNs) that consist of Micro-Sensory-Units (MSUs), mainly in air and atmospheric assessments (Mead et al. 2013; Chen 2008; Dutta et al. 2009; Williams et al. 2013; Etzion et al. 2013; Broday et al. 2013) and aquatic systems (Kroll and King 2007; Hall et al. 2007; Pickard et al. 2011; Research and Development, National Homeland Security Research Center 2005; Kramer 2009; Storey et al. 2011). These have greatly enhanced monitoring of complex infrastructure and the natural environment, allowing the study of fundamental processes in the environment, as well as hazard warnings, such as flood (Hart and Martinez 2006; Martinez and Hart 2004; Zhou and Roure 2007) and pollution alerts (Hochbaum and Fishbain 2011), in a new way. In conjunction new hardware designs and algorithmic approaches to support these networks have emerged (Ramanathan et al. 2006; Budde et al. 2012; Denzer 2005; Kranz et al. 2010; Bakken et al. 2001). The focus of most of these studies is an efficient operation of the network and failure tolerance and therefore they do not provide new insights on the monitored environments. Further, many problems studied in the field, have their roots in the desire to emulate cognitive capabilities of a human (e.g., Ramanathan et al. 2006; Chen 2008; Dutta et al. 2009). With the rapid advances in hardware technology, this anthropocentric and somewhat limited paradigm may no longer be the only source for inspiration. The variety and availability of sensors have made the accessible data much greater in quantity than the data that can be gathered and interpreted by a human being. However, considering the sheer amount of data and its diversity, building such multi-sensors systems becomes a great challenge.

Field deployments of low-cost air quality MSU-based WDESN have been recently reported (Mead et al. 2013; Williams et al. 2013). Williams et al. (2013) showed the use of metal-oxide micro-sensors for measuring ambient O_3 levels and Mead et al. (2013) used electrochemical probes for measuring CO, NO and NO₂. These studies do not present a network configuration for air pollution measurements. Therefore, their ability to capture the spatial pollutant variability has not been shown.

The ability and potential of WDESN to capture spatial and temporal variation in field campaigns has been recently demonstrated (Broday et al. 2013; Shashank et al. 2013). These studies regard only one indicator (pollutant) in their analysis. The integration of different modalities possesses the ability to exploit the sensors' cross-selectivity and to compensate each modality's inherent deficiencies by utilizing the strengths of the other modalities. This is still a relatively new discipline, and little effort has so far been devoted to the implementation of fully operational devices for environmental applications as seen in other fields such as computer vision and robotics. Such spatial and temporal analysis of several indicators on a well-defined environment, through WDESN, has been recently reported by Moltchanov et al. (2015).

This new emerging field, environmetics (environmental informatics), calls for a new set of algorithms and methodologies originating from several distinct disciplines – chemistry, environmental sciences, optimization, multi-dimensional signal processing, data fusion and data communication. To facilitate any discussion between scholars from these different research fields, there is a need to build a comprehensive, yet simple, framework. Here such framework is presented. Section 12.2 presents the framework, its components and its lexis foundations. Section 12.3 demonstrates the usage of the presented lexis in the context of air-pollution distributed sensory network by describing the results reported by Moltchanov et al. (2015). Section 12.4 concludes this chapter.

12.2 Framework

12.2.1 Lexis

This section introduces the lexis that facilitates the Environmental Multimodal Distributed Sensory Network framework. *An environmental episode* is a disruption in the environmental conditions. To this end, an episode can be a major environmental happening, such as high or irregular gamma radiation levels (Hochbaum and Fishbain 2011), volcanic eruptions (Werner-Allen et al. 2006) or mass fish death (CNN Wire Staff 2011). It can also be a typical happening such as traffic rush hours. Such environmental episode consists of recorded *events*. Events are a set of *incidents*, which are recorded by a single or a set of sensors, and are found to be related to an environmental episode. Events in those cases are, for example, the deviations from the regular background radiation; the seismic-acoustic recordings and the oxygen levels in the aquatic system. Each incident represents one or more measured environmental indicators (Fig. 12.1). In the context of air-pollution, this can be ozone (O₃), nitrogen dioxide (NO₂) or particular matter (PM). This formulation ensures, by definition, the following:

Corollary 1

- Each environmental episode has a well-defined spatial and temporal window.
- An environmental episode manifests itself in the sensors' acquired data.

Events are extracted from streams of *incidents* and only then are cross-referenced. The key justification behind this dichotomy is that different set of algorithms are called for extracting events from a stream of incidents, and for relating these events. The separation of these tasks also allows for distributed processing, as the event extraction can be held on the sensing platform itself. The

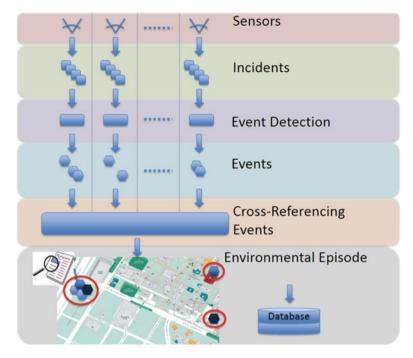


Fig. 12.1 Multimodal distributed sensory networks dataflow and terminology

set of extracted events is processed by a set of analytics tools for individual data streams as well as multiple data streams of various types. Both kinds of analytics are needed for unveiling the information embedded within each data stream/source as well as the information that is spread across various data sources. This formulation facilitates an efficient and reliable processing of exceptionally large environmental data sets (of size in the tens of thousands or millions entries).

12.2.2 Event Detection in Streams of Incidents

The small size and low power-consumption of MSU allow for mobile measurements. Placing these units on vehicles enables the coverage of a wider area with a lower number of units, while keeping the spatial and temporal resolution high enough. Few recent studies showed the possibility and advantages of such use, and the relatively easy adaptation of such MSU's to function as mobile sensing units, with the addition of GPS (Al Ali et al. 2010; Devarakonda et al. 2013; Levy et al. 2012). Thus, WDESN may consist of stationary and mobile nodes. Therefore the discussion is a dual-facet one, where incident streams generated from stationary and mobile WDESN nodes should be addressed differently. The following sections address event detection in streams received from stationary and mobile nodes.

12.2.2.1 Event Detection in Streams of Stationary WDESN Nodes

The common practice for extracting events from a set of incidents is finding a deviation from a pattern that represents the normal or routine set of incidents. The patterns may be computed from the indicators' time series themselves (e.g., Hall et al. 2007; Pickard et al. 2011), or from any representation of the data. Typical data representation techniques are Principal Component Analysis (PCA) (e.g., Huang et al. 2010), spectral exploration (e.g., Eder et al. 2012; Koscielny-Bunde et al. 1998; Whitcher and Jensen 2000) or De-trended Fluctuation Analysis – FDA (e.g., Koscielny-Bunde et al. 1998; Talkner and Weber 2000). All aforementioned methods require that the data samples are acquired in a uniform fashion, i.e., with the same time and spatial intervals between samples. However, this requirement, typically, does not hold for the dataset in hand. To tackle this hurdle, data interpolation methods that interpolate the data in a regular grid fashion from the non-uniform samples are sought. These methods include, for example, the Discrete Sampling Theorem (Yaroslavsky et al. 2009) and, in the context of air pollution, the Inverse Distance Weighted (IDW) (Moore et al. 2008) and Kriging (Sarigiannis and Saisana 2008) interpolations.

Regardless of the representation method, an incident can be regarded as an event if the deviation from the pattern is above a certain threshold. The threshold can be set manually (e.g., Pickard, et al. 2011) or inferred in an automatic fashion based on the acquired data and trends observed (Arad et al. 2013). This approach, however, is vulnerable to faulty measurements that present a large deviation from the pattern.

Classification approaches such as Support Vector Machine (SVM) (e.g., Oliker and Ostfeld 2012), Minimum Volume Ellipsoid (MVE) (Becker and Gather 1999) or the Supervised Normalized Cut (SNC) (Yang et al. 2013) present a more robust event detection schemes as they allow for the integration of several environmental indicators into one recorded incident. SVM aims at separating events from the background stream of incidents. The SVM method consists of two stages – At the first stage, incidents that are known to be an event and incident that are known to be non-event (i.e., routine) are applied on an environmental indicators space. Then, based on the pre-classified data, a classifier is constructed on this space. At the second stage each new incident is compared against the classifier and tagged accordingly. SVM requires that normal and abnormal incident patterns are known before-hand. While routine patterns can be extracted from continuous streams of incidents (e.g., Kroll and King 2007; Hall et al. 2007; Pickard et al. 2011), considering all possible abnormal indicators' conditions and values is not a tractable task.

MVE solves this problem by using only the non-event incidents in the training phase (Becker and Gather 1999). The MVE, in its training phase, constructs a minimum volume ellipsoid on the indicators space, which includes all non-event incidents. Then any measurement that falls outside this ellipsoid is considered to be an event.

The SNC method forms the event detection task as graph-cuts optimization problem. In this formulation an undirected graph, G(V,E), is constructed, where




Fig. 12.2 SNC procedure

V is the set of incidents and E is the set of edges connecting adjacent incidents. The set of incidents contains both tagged (either as event or as non-event) and untagged incidents. A node that corresponds to an event-incident, is referred to as an event-node. Each edge $[i,j] \in E$ carries a similarity weight, w_{ij} , that represents the similarity between incidents i and j. The method is more generalized than SVM and MVE as adjacency (i.e., what characteristic qualifies two incident to be considered adjacent) and the similarity measures are not dictated by the SNC formulation and can be set by the characteristics of the specific problem in hand. Once the graph is constructed two additional nodes, s and t, are added to the graph. An arc with infinite weight is drawn from s to all event-nodes and from all non-event nodes to t. The construction of the graph is illustrated in Fig. 12.2a, where event-nodes are marked with an "E", non-event nodes are presented with diagonal markings and untagged nodes are solid.

The classification is then held by solving the s-t minimum-cut problem (Ford and Fulkerson 1956) on the graph. The minimum s-t cut problem partitions the nodes in the graph into two partitions, S and T, such that $s \in S$ and $t \in T$ and the sum of similarity weights on edges going between S and T (i.e., the cut) is minimized. After the partition, all incidents that correspond to nodes in S, are considered as an event and all incidents that are associated with nodes in T are tagged as non-event. The classification process is illustrated in Fig. 12.2b. All untagged nodes are now tagged based on the cut.

12.2.2.2 Event Detection in Streams of Mobile WDESN Nodes

Streams received from portable sensors are obtained from the same sensor in different locations at different times. Thus, mobile sensors' measurement are time-space variant. While networks that consist of mobile sensory platforms (Al Ali et al. 2010; Devarakonda et al. 2013; Levy et al. 2012) have been suggested, little effort has been invested in fusing the readings (i.e., incidents) into one holistic spatio-temporal patterns. Pattern recognition in mobile sensory networks has been suggested through the *concentrated alert* (CA) *problem*. The CA problem aim at optimizing two goals: One goal is to identify a small region; another goal is to have a large number of sensors indicating high pollution levels. These two goals are potentially conflicting – focusing on a large number of sensors reporting high levels

of pollution within an area is likely to result in the entire region; on the other hand focusing on concentration alone would result in a single block of the area containing the highest number of sensors reporting high concentrations, thus disregarding information provided by other detectors in neighboring areas. The goal then is to identify, at every period of time, a region that relatively to its size has high concentration of sensors reporting high pollution levels. One way to achieve this is by minimizing a ratio function of the size divided by the number of detected events in the region. Another, is to optimize a weighted combination of the goals. As was shown in (Hochbaum and Fishbain 2011) the latter problem is efficiently solvable in polynomial time.

One iteration of the CA problem finds one region with the highest concentration of sensors reporting highest levels of pollution, hence a binary decision, which is based on solving a minimum-cut problem on an associated graph (Hochbaum and Fishbain 2011). After each iteration the region that was tagged as risky with its corresponding sensors are removed and the process is repeated so equi-pollution contour lines are produced. The final output is the patterns and deviations from these patterns are events.

Another graph-theory based method, firstly presented here, for generating patterns from distributed sensory network is based on Markov Random Fields (MRF) (Hochbaum 2001). The MRF optimization problem aims at finding a value such that two functions are minimized: a deviation cost function that depends on the distance between an observed value and a modified one; and a penalty function that grows with the distance between values of related (adjacent) pairs, i.e., a separation function. Specifically, within the suggested framework, the goal is to modify the indicators' values so that an objective function, consisting of one term due to the deviation of the events' values from the measurements, and a second term that penalizes differences in assigned values to adjacent spatial sensors, is minimized. This is illustrated in Fig. 12.3.

Adjacency is not mandated by the method and can be derived from the characteristics of the problem in hand. For example incidents can be considered to be adjacent if they are less than a predefined distance from each other. Once adjacency is determined, one has to assign the deviation and separation weights. This implies that for computing the separation cost function one should extract the affinity function for all adjacent incidents pairs.




Fig. 12.3 Markov Random Field

For G() and F() the deviation and separation cost functions respectively, g_j – events value in node j, the problem is to find a pattern X that consists of a set of $x_i \in X$ that minimizes the following objective function:

$$min_X \left\{ \sum_{i \in V} G_j(g_i, x_i) + \sum_{(i,j) \in A} F_{ij}(x_i - x_j) \right\}$$

When the separation function is linear and the deviation function is linear, quadratic or piecewise linear convex, the MRF problem can be solved efficiently (in strongly polynomial time) through network flow algorithm (Hochbaum 2001).


12.2.3 Cross Referencing Events

In order to understand the nature of the entire environmental episode based on all extracted events, one has to find a set of events that co-align with each other and best explain the observed environmental episode. To this end, the common methods are the Maximum Likelihood Estimation (MLE) (e.g., Álvarez, et al. 2005), Artificial Neural Networks (ANN) (Reich, et al. 1999; Gardner and Dorling 1998) and the Dempster-Shafer Theory (D-S) (e.g., Wang, et al. 2006; Yadav, et al. 2013).

The MLE approach assumes an underlying model and aims at finding the model's parameters that are most probable, given the observations. For example, Álvarez et al. present a Markov chain model to study air pollution, where daily maximum ozone measurements in Mexico City are assumed to follow a Markov chain of order K > 0. The parameter K is then inferred using MLE (Álvarez et al. 2005). The necessity of a model is a drawback of these types of methods as describing environmental and atmospheric phenomena by an accurate model is an extremely difficult task.

In its most general formulation ANN consists of a system of simple interconnected neurons, or nodes (as illustrated in Fig. 12.4), which represent a nonlinear mapping between an input vector (events in this case) and an output vector (episodes). The nodes are connected by weights and output signals which are a function of the inputs to the node modified by a simple nonlinear transfer, or activation, function. It is the superposition of many simple nonlinear transfer functions that enables the multilayer perceptron to approximate extremely non-linear functions. The output of a node is scaled by the connecting weight and fed forward to be an input to the nodes in the next layer of the network. This implies a feed-forward neural network, where each input, I_i , goes through several such functions. Each *i*th transfer function in layer Lf_i^L , can be of a different form. Due to its easily computed derivative a commonly used transfer function is the logistic function, $y = (1 - e^{-x})^{-1}$, but any other function would work. As both the input

Fig. 12.4 Artificial neural network for associating events with episodes



events $\{I_1, I_2, I_3, I_4, \dots, I_n\}$ and observed episodes $\{O_1, O_2, O_3, \dots, O_q\}$ are known, the goal is to find the various functions' parameters that explain best the linkage between the events of episodes. The resulted network and its parameters explain the role of various events in the observed episodes. Thus the goal is not to detect the happening of an episode, but to infer the events that contribute to its happening.

In its core the D-S methodology is a generalization of the Bayesian theory of subjective probability. For illustration of the problem, let us consider an episode, O, and a set of related events, Ω . All subsets of events, $\{\omega\} \subseteq \Omega$, are assigned with a probability [0,1] that represents their post-priori probability to actually happen given observation O, such that $\sum_{\omega \subseteq \Omega} P(\omega) = 1$. Two values are then calculated for each subset, ω_i :

- Belief Value the sum of probabilities of all subsets that include ω_i , i.e., $Bel(\omega_i) = \sum_{\omega_i \supseteq \omega_i} P(\omega_j)$.
- Plausibility value the sum of probabilities of all subsets that intersect with, ω_i , thus $Pl(\omega_i) = \sum_{\omega_i \cap \omega_i \neq \phi} P(\omega_j)$.

 $Bel(\omega_i)$ represents the evidence we have for ω_i directly. So $P(\omega_i)$ cannot be less than this value. $Pl(\omega_i)$ represents the maximum share of the evidence, if, for all sets that intersect with ω_i , the part that intersects is actually valid. Thus, $Pl(\omega_i)$ is the maximum possible value of $P(\omega_i)$. The difference, $(Pl(\omega_j) - Bel(\omega_j) \ge 0)$, called the *belief interval*, represents how certain a belief, ω_i is. Thus, how accurate is the initial assumption about its post-prior conditional probability given O.

12.3 Neighborhood Scale Air-Quality Environmental Indicators

Next we illustrate the use of the suggested framework within the context of air-quality monitoring by describing the results of (Moltchanov et al. 2015) in the above terminology. In their study Moltchanov et al. (2015) report ambient measurements of gaseous air pollutants by a WDESN of MSUs that have been deployed in three urban sites, about 150 m apart. This study of Moltchaqnov et al. is the first time a network's capability to capture spatiotemporal variations is demonstrated at a sub-neighborhood spatial resolution, which suits the requirement for highly spatiotemporal resolved measurements at the breathing-height when assessing exposure to urban air pollution.

12.3.1 Study Design

The study region is the city of Haifa, located in the north of Israel with a population of ~265,000. The city is located at the northern part of the Israeli Mediterranean Sea shore, ranging from sea level to the Carmel mountain ridge at ~500 m above sea level (ASL). The Haifa bay area is a busy metropolitan, combining both densely populated residential areas and a large industrial complex which includes a primary sea-port, petrochemical industries and oil refineries. The entire region is burdened with traffic, including heavy vehicles, cargo trains and a large number of diesel buses, as Haifa functions as a transportation center for the entire northern region of Israel.

Specifically, the study was performed at the Neve Sha'anan neighborhood – a residential neighborhood located on a relatively leveled region of the Carmel Ridge, about 200 m ASL. The neighborhood is roughly divided by a major road (Trumpeldor Ave.), which also serves as the main commercial center for the residents of this area (Fig. 12.5).

In the study described in (Moltchanov et al. 2015), six units were deployed at three different locations some 100–150 m apart – sites A, B and C in Fig. 12.5. The campaign took place for 71 days in the summer of 2013 (between 16/06/2013 and 26/08/2013), a season that is characterized by meteorological stability and persistence. Site A is a balcony on small residential street. The units were placed 3 m high above ground level (AGL) and 5 m off the centerline of the road, which experience sparse traffic density. Site B is a second story balcony. The first story of the building houses a pizzeria with an exhaust at the rear side of the building. The units were placed 4 m AGL and 7 m off an adjacent busy street. The building is a corner building of the Ziv junction, which is a busy local (neighborhood-scale) commercial zone (see Fig. 12.5b and c). Site C is located on the Trumpeldor Blvd., the main street of the neighborhood, ~80 m NE from a busy bus stop. The units were placed on a roof of a kindergarten courtyard, 3 m AGL and 4 m off road.

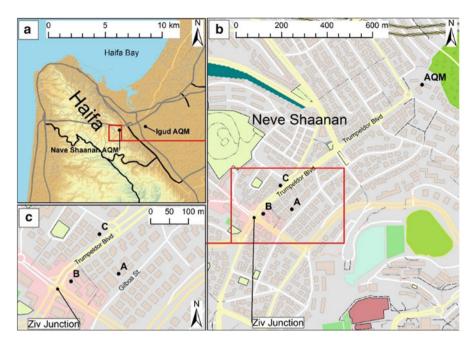


Fig. 12.5 Map of the study region showing the Haifa bay area and the Carmel Ridge (a), Nave Shaanan neighborhood (b) and the Ziv Junction area in greater detail (c)

Wind data were obtained from the Nave Shaanan AQM station (marked AQM in Fig. 12.5b), located 750 m down the road from site C.

12.3.2 Incident Streams

The incident streams are produced by CanarITTM air quality MSUs (Airbase Systems LTD). Each unit generates streams of ambient levels of the following indicators – O_3 , NO_2 , total VOC (tVOC), Total Suspended Particles (TSP), noise, temperature (Temp) and relative humidity (RH). In this analysis we focus on NO_2 and O_3 measurements only. Each apparatus gauges the indicators' level over a short time period (Meas.T) and reports the average level, computed over Meas.T, at a given Frequency (Freq). Thus, Meas.T is shorter than the time between reports (1/Freq). The technical specifications of the various sensors are detailed in Table 12.1. Measurements are transmitted to a cloud-based storage, by an on-board GSM embedded chip.

Throughout the campaign, one unit was fixed at each site. The three remaining units were rotated twice between the sites, on days 28 and 51 from the beginning of the campaign, so that each of these three units operated at each of the three sites. The rotation allowed for comparison within and between the sites, thus enabling to

Stream	Man.	Model	Meas.T [s]	Freq. [Hz]	Dyn.R [ppb]	Res. [ppb]
O_3	Aeroqual	SM50	1	60	0-150	1
NO2	AppliedSensors	iAQ-100	2	20	0-2,000 ppb	5
tVOC1	AppliedSensors	iAQ-100	2	20	0-2,000 ppm ²	
TSP			0.5	20		
Noise			0.25	20		
Temp.			0.5	20		
RH			0.5	20		

Table 12.1 Sensors technical specifications

Man. manufacturer, Meas.T acquisition time, Freq. reports frequency, Dyn.R sensors' dynamic range, Res. the sensors' resolution

Table 12.2	Location of units	during each of	the study periods

		Period I – days 1–28	Period II – days 28–50	Period III – days 50–71
Site	Fixed units	Jun. 16 – Jul. 14	Jul. 14 – Aug. 5	Aug. 5 – Aug. 26
A	418	422	413	424
В	420	424	422	413
С	414	413	424	422

compare the obtained streams across the different locations and the sensor nodes. Table 12.2 details the sensors' location throughout the field campaign. Because of the persistent meteorological conditions over the region in the summer, 21–28 days' time periods are assumed sufficient to characterize the pollution levels at each of the microenvironments.

As detailed in (Moltchanov et al. 2015), in general, high correlations were found among incidents of collocated WDESN nodes, suggesting consistency across different MSUs' measurements. In contrast, low correlations are depicted between concentrations of both NO_2 and O_3 measured by MSUs at different locations, indicating that the measured concentrations echoed some local conditions and responded to the specific microenvironment where the nodes were placed.

12.3.3 Events Detection in Streams of Incidents

Diurnal patterns of NO_2 and O_3 concentrations among collocated MSUs were highly correlated. NO_2 and O_3 daily patterns are presented in Fig. 12.6. Figures (a) and (c) depict weekday's pattern of NO_2 and O_3 respectively. Figures (b) and (d) present the corresponding weekend's patterns. Both NO_2 and O_3 reveal distinct patterns in each site. The reason for this is twofold – first each microenvironment is governed by different conditions. Second, the sensors themselves present inherent biases.

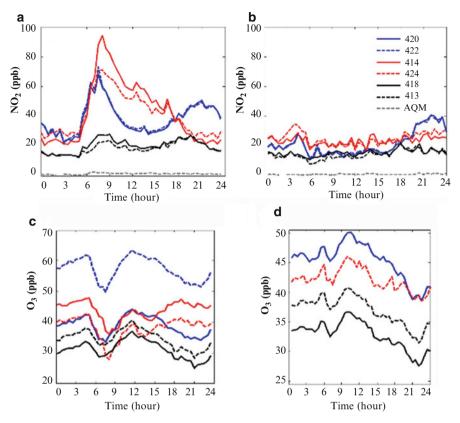


Fig. 12.6 Daily patterns of NO2, (**a**) and (**b**), and O3, (**c**) and (**d**), concentrations (30 min. averages) measured by collocated nodes in locations A (*black lines*), B (*blue lines*) and C (*red lines*) during Period II. Plates (**a**) and (**c**) are weekdays (Sunday–Thursday) patterns, plates (**b**) and (**d**) weekends (Saturdays) patterns. *Dashed grey lines* – simultaneous AQM monitoring data (Source Moltchanov et al. 2015)

This is especially true for O_3 sensors (see Fig. 12.6c and d). Regardless of the reason for these differences, the phenomenon itself emphasizes the advantage of extracting events from each stream of incidents separately.

In the study of Moltchanov et al. (2015), the goal was to assess the MSUs' capability to capture real-life phenomena. Therefore, let us consider incidents acquired from a specific stream as events if they present values that are higher or lower (by a standard deviation) than the specific stream's average. This should correspond to higher and lower values of NO2 and O3 respectively during morning and evening traffic peaks (Levy et al. 2012; Nazaroff and Alvarez-Cohen 2001; Zalel et al. 2008). On weekday, events were recorded, for example, between 7 and 8 am. On weekends, on the other hand, the daily peaks diminish (Fig. 12.6b, d) and therefore no events are recorded.

Site A is located in a small residential street with little traffic and is characterized by lower NO_2 concentrations than the two other sites (See sensor # 413 and 418 in Fig. 12.6a and b). Nevertheless, events are recorded at site A at morning (7:00–7:30) and at evening (~19:30) rush hour peaks. Site B is located at a busy junction in a commercial area. Indeed, the diurnal NO_2 patterns on weekdays reveal a dual-peak daily pattern (Fig. 12.6a), where events are indeed recorded around these peaks. On Saturdays the concentrations remain low and constant until ~19:00, when traffic resumes (Fig. 12.6b). However no events are recorded on weekends. The signature of traffic is revealed also in the weekday ozone concentration patterns that show a dramatic decrease from 05:30 am and reach a minimum at about 07:00–07:30, in parallel to a peak in NO_2 concentrations. Typically, O_3 concentrations increase afterwards and reach peak values at around noon (Fig. 12.6c). Likewise, events extracted from NO_2 and O_3 streams at site C indicate traffic related origin. Peak NO_2 concentrations and minimum O_3 concentrations occurred between 08:00 and 09:00 am.

12.3.4 Cross Correlating Events

Once the set of events are extracted one can cross-correlate them and infer the observed episode. Based on the recorded events, the morning episode at sites A and B starts on average at 7:00 am. Thus, the morning episode's spatial boundaries contain both sites. The episode at site C starts somewhat later than that, forming a different episode. It is worthwhile noting that the suggested reasoning, given in (Moltchanov et al. 2015), is that while the episodes in A and B are due to traffic behavior, the episode at site C is due to children drop off at the kindergarten, located at C. The association of events recorded in sites B and C with the same morning episode is supported by the low mean wind speed (Fig. 12.7a) and the high traffic volume at the Ziv junction, which result in high concentrations at both B and C.

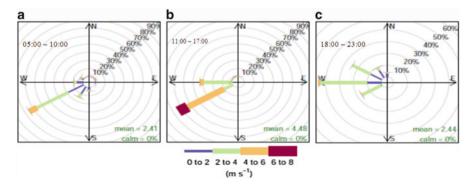


Fig. 12.7 Wind rose plots based on data measured at the AQM station on period I. (a) Morning, (b) noon and afternoon, and (c) evening (Source Moltchanov et al. 2015)

In the afternoon, however, reduced traffic volume and higher wind speeds (Fig. 12.7b) result in significantly lower concentrations at site B whereas site C maintains its relatively higher concentrations. Thus, the evening episode is bounded to site C only.

This detailed discussion demonstrates the capability of the suggested framework to capture both spatial and temporal boundaries of an environmental episode – traffic pollution in this case. The episodes correspond to intra-urban pollutant "hotspots", which in return can be treated. The aggregation of the events into set of episodes allows for investigating the episode separately, while incorporating all supporting relevant data in the process and eliminating all non-relevant data. Hence, the use of the suggested framework has a huge potential for providing a comprehensive, yet simple framework for capturing environmental indicators' impact and their dynamic spatial and temporal variability. As such it presents a great potential to become a common tool in examining environmental indicators acquired through WDESN.

Conclusion

In this chapter a framework and its lexis foundations for analyzing measurements acquired by Wireless Environmental Distributed Sensory Network (WDESN) is presented. A set of sensors acquire observations of environmental indicators. These are formed by the sensing platform as streams of incidents. Incidents that deviate from the normal pattern are regarded as events. The event extraction can be held on the sensing platform itself, which facilitates distributed analysis of the acquired data. Then the events are cross-referenced for inferring environmental episodes. This formulation ensures, by definition, that an environmental episode is well defined in time and space and manifests itself in the recorded incidents by the sensors. Algorithms and methods that constitute the framework are also described.

A practical example of using this framework for describing the results of (Moltchanov et al. 2015) is given. In this example, it is shown how the framework set the spatial and temporal boundaries of an environmental episode and how it captures its dynamic behavior. This shows the great potential of such framework for any future environmental research that is based on WDESN.

References

Al Ali A, Zualkernan I, Aloul F (2010) A mobile GPRS-sensors array for air pollution monitoring. IEEE Sens J 10(10):1666–1671

Álvarez L, Fernández-Bremauntz A, Rodrigues E, Tzintzun G (2005) Maximum a posteriori estimation of the daily ozone peaks in Mexico City. J Agric Biol Environ Stat 10(3):276–290 Arad J, Housh M, Perelman L, Ostfeld A (2013) A dynamic thresholds scheme for contaminant event detection in water distribution systems. Water Res 47(5):1899–1908

Bakken G, Kauffmanl G, Jurs P, Albert K, Stitzel S (2001) Pattern recognition analysis of optical sensor array data to detect nitroaromatic compound vapors. Sens Actuators B 79:1–10

- Becker C, Gather U (1999) The masking breakdown point of multivariate outlier identification rules. J Am Stat Assoc 94(447):947–955
- Broday D, Fishbain B, Etzion Y, Levy I (2013) Evaluation of low-cost PM sensors, intended for use in a dense monitoring grid. Portland Oregon, s.n.
- Budde M, Berning M, Busse M, Miyaki T, Beigl M (2012) The TECO envboard: a mobile sensor platform for accurate urban sensing and more. In: Ninth International Conference on Networked Sensing Systems (INSS), Antwerp, Belgium
- Chen C (2008) Transform methods for remote sensing environmental monitoring. IEEE Signal Processing Society, Las-Vegas, pp 5165–5168
- CNN Wire Staff (2011) Lack of oxygen likely cause of fish kill in California. Cable News Network (CNN), Los Angeles
- Denzer R (2005) Generic integration of environmental decision support systems state-of-the-art. Environ Model Softw 20(10):1217–1223
- Devarakonda S, Sevusu P, Liu H, Liu R, Iftode L, Nath B (2013) Real-time air quality monitoring through mobile sensing in metropolitan areas. In: Proceedings of the 2nd ACM SIGKDD international workshop on urban computing. ACM
- Dutta P, Aoki P, Kumar N, Mainwaring A, Myers C, Willett W, Woodruff A (2009) Common sense: participatory urban sensing using a network of handheld air quality monitors. In: 7th ACM Conference on Embedded Networked Sensor Systems (SenSys '09). ACM, Berkeley, CA
- Eder B, Appel W, Pierce T (2012) On the use of principal component and spectral density analyses to evaluate the community multiscale air quality (CMAQ) model. In: Air pollution modeling and its application XXI. Springer, Dordrecht, pp 439–445
- Etzion Y, Broday D, Fishbain B (2013) Analysis of image color and effective bandwidth as a tool for assessing air pollution at urban spatiotemporal scale. SPIE, San Francisco
- Ford LR, Fulkerson DR (1956) Maximal flow through a network. Can J Math 8:399-404
- Gardner M, Dorling S (1998) Artificial neural networks (the multilayer perceptron) a review of applications in the atmospheric sciences. Atmos Environ 32(14–15):2627–2636
- Hall J, Zaffiro A, Marx R, Kefauver P, Krishnan R, Haught R, Herrmann J (2007) On-line water quality parameters as indicators of distribution system contamination. J Am Water Works Assoc 99(1):66–77
- Hart J, Martinez K (2006) Environmental sensor networks: a revolution in the earth system science? Earth Sci Rev 78(3-4):177-191
- Hochbaum D (2001) An efficient algorithm for image segmentation, Markov Random Fields and related problems. J ACM 48(2):686–701
- Hochbaum D, Fishbain B (2011) Nuclear threat detection with mobile distributed sensor networks. Ann Oper Res 187(1):45–63
- Huang J, Choi H, Hopke P, Holsen T (2010) Ambient mercury sources in Rochester, NY: results from principle components analysis (PCA) of mercury monitoring network data. Environ Sci Technol 44(22):8441–8445
- Koscielny-Bunde E, Bunde A, Havlin S, Roman H, Goldreich Y, Schellnhuber H (1998) Indication of a universal persistence law governing atmospheric variability. Phys Rev Lett 81 (3):729–732
- Kramer K (2009) Continuous monitoring of waters by biological early warning systems. In: Rapid chemical and biological techniques for water monitoring. Wiley, West Sussex, pp 197–219
- Kranz M, Holleis P, Schmidt A (2010) Embedded interaction: interacting with the Internet of things. Internet Comput IEEE 14(2):46–53
- Kroll D, King K (2007) Operational and laboratory verification testing of a heuristic on-line water monitoring system for security. Int J High Speed Electron Syst 17(4):631–642
- Levy I, Mihele C, Lu G, Narayan J, Hilker N, Brook J (2012) Elucidating multipollutant exposure across a complex metropolitan area by systematic deployment of a mobile laboratory. Atmos Chem Phys Discuss 12:31585–31627
- Martinez K, Hart J (2004) Environmental sensor networks. Computer 37(8):50-56

- Mead M, Popoola O, Stewart G, Landshoff P, Calleja M, Hayes M, Baldovi JJ, Hodgson TF, McLeod MW, Dicks J, Lewis A, Cohen J, Baron R, Saffell JR, Jones R (2013) The use of electrochemical sensors for monitoring urban air quality in low-cost, high-density networks. Atmos Environ 70:186–203
- Moltchanov S, Levy I, Etzion Y, Lerner U, Broday DM, Fishbain B (2015) On the feasibility of measuring urban air pollution by wireless distributed sensor networks. Sci Tot Environ 502:537–547
- Moore K, Neugebauer R, Lurmann F, Hall J, Brajer V, Alcorn S, Tager I (2008) Ambient ozone concentrations cause increased hospitalizations for asthma in children: an 18-year study in Southern California. Environ Health Perspect 116(8):1063–1070
- Nazaroff W, Alvarez-Cohen L (2001) Environmental engineering science. Wiley, New York
- Oliker N, Ostfeld A (2012) A weighted support vector machine classifier for contamination event detection in water distribution systems. Adelaide, s.n.
- Pickard B, Haas A, Allgeier S (2011) Optimizing operational reliability of the Cincinnati contamination warning system. J Am Water Work Assoc 103(1):60–68
- Ramanathan N, Balzano L, Estrin D, Hansen M, Harmon T, Jay J, Kaiser B, Sukhatme G (2006) Designing wireless sensor networks as a shared resource for sustainable development. In: IEEE International Conference on Information and Communication Technologies and Development (ICTD 2006). IEEE Society on Social Implications of Technology (SSIT), Berkeley, pp 256–265
- Reich S, Gomez D, Dawidowski L (1999) Artificial neural network for the identification of unknown air pollution sources. Atmos Environ 33(18):3045–3052
- Research and Development, National Homeland Security Research Center (2005) Technologies and techniques for early warning systems to monitor and evaluate drinking water quality: a state-of-the-art review. US Environmental Protection Agency (USEPA), Cincinnati
- Sarigiannis D, Saisana M (2008) Multi-objective optimization of air quality monitoring. Environ Monit Assess 136:87–99
- Shashank J, Levy I, Fishbain B, Broday D, (2013) Application of distributed sensor networks for estimating exposures to air pollution in urban areas. Basel, s.n.
- Storey M, Gaag B v d, Burns B (2011) Advances in on-line drinking water quality monitoring and early warning systems. Water Res 45(2):741–747
- Talkner P, Weber R (2000) Power spectrum and detrended fluctuation analysis: application to daily temperatures. Phys Rev Ser E 62:150-160
- Wang Y, Yang J, Xu D (2006) Environmental impact assessment using the evidential reasoning approach. Eur J Oper Res 174(3):1885–1913
- Werner-Allen G, Lorincz K, Welsh M, Marcillo O, Johnson J, Ruiz M, Lees J (2006) Deploying a wireless sensor network on an active Volcano. IEEE Internet Compu 10(2):18–25
- Whitcher B, Jensen M (2000) Wavelet estimation of a local long memory parameter. Explor Geophys 31:94–103
- Williams D, Henshaw G, Bart M, Laing G, Wagner J, Naisbitt S, Salmond J (2013) Validation of low-cost ozone measurement instruments suitable for use in an air-quality monitoring network. Meas Sci Technol 24(6):5803–5814
- Yadav J, Kharat V, Deshpande A (2013) Evidence theory and fuzzy relational calculus in estimation of health effects due to air pollution. J Intell Syst 22(1):9–23
- Yang Y, Fishbain B, Hochbaum D, Norman E, Swanberg E (2013) The supervised normalized cut method for detecting, classifying, and identifying special nuclear materials. INFORMS J Comput 26(1):45–58
- Yaroslavsky L, Shabat G, Ideses I, Salomon B, Fishbain B (2009) Non-uniform signal sampling, signal and image recovery from sparse data. J Opt Soc Am A 26(3):566–575
- Zalel A, Yuval, Broday D (2008) Revealing source signatures in ambient BTEX concentrations. Environ Pollut 156(2):553–562
- Zhou J, Roure D (2007) FloodNet: coupling adaptive sampling with energy aware routing in a flood warning system. J Comput Sci Technol 22(1):121–130

- Huttunen JT, Väisänen TS, Heikkinen M, Hellsten S, Nykänen H, Martikainen PJ (2002) Exchange of CO₂, CH₄ and N₂O between the atmosphere and two northern boreal ponds with catchments dominated by peatlands or forests. Plant Soil 242:137–146
- International Rivers (2007) 4% Global warming due to dams, says new research, http://www.internationalrivers.org/node/1361. Cited 03 March 2013
- Kantoush SA, Sumi T (2010) River morphology and sediment management strategies for sustainable reservoir in Japan and European Alps. Annuals of Diass. Res. Inst., Kyoto Universitet, 53B
- Landsberg JH (2002) The effects of harmful algal blooms on aquatic organisms. Rev Fish Sci 10:113-390
- Larssen T, Zhang H, Feng X (2010) An integrated survey on mercury pollution and its impacts in Guizhou Province, China. Geochim Cosmochim Acta 74 (Suppl) ISSN 0016-7037
- Lima IBT (2005) Biogeochemical distinction of methane releases from two Amazon hydroreservoirs. Chemosphere 59:1697–1702
- Lima IBT, Ramos FM, Bambace LAW, Rosa RR (2008) Methane emissions from large dams as renewable energy resources: a developing nation perspective. Mitig Adapt Strat Glob Chang 13:193–206
- Mailman M, Stepnuk L, Cicek N, Bodaly RA (2006) Strategies to lower methyl mercury concentrations in hydroelectric reservoirs and lakes: a review. Sci Total Environ 368:224–235
- Morita K, Yamamoto S, Hoshino N (2000) Extreme life history change of whites potted char (Salvelinus leucomaenis) after damming. Can J Fish Aquat Sci 57:1300–1306
- Morley NJ (2007) Anthropogenic effects of reservoir construction on the parasite fauna of aquatic wildlife. Ecohealth 4:374–383
- Müller J, Ruppert H, Muramatsu Y, Schneider J (2000) Reservoir sediments a witness of mining and industrial development (Malter Reservoir, eastern Erzgebirge, Germany). Environ Geol 39:1341–1351
- Palau A (2006) Integrated environmental management of current reservoirs and regulated rivers. Limnetica 25:287–302
- Perkins RG, Underwood JC (2000) Gradients of chlorophyll A and water chemistry along an eutrophic reservoir with determination of the limiting nutrient by in situ nutrient addition. Water Res 34:713–724
- Quinn F, Day JC, Healey M, Kellow R, Rosenberg D, Saunders OJ (2004) Chapter 1. Water allocation, diversion and export. In: Threats to water availability in Canada, NWRI scientific assessment report series No. 3; ACSD science assessment series No. 1. National Water Research Institute and Meteorological Service of Canada, Burlington
- Rounds SA (2007) Temperature effects of point sources, riparian shading, and dam operations on the Willamette River, Oregon. U.S. Geological Survey Scientific Investigations Report 2007–5185, 34 p. Available online at: http://pubs.usgs.gov/sir/
- St. Louis VL, Kelly CA, Duchemin E, Rudd JWM, Rosenberg DM (2000) Reservoir surfaces as sources of greenhouse gases to the atmosphere: a global estimate. BioScience 50:766–774
- Sumi T, Hirose T (2009) Water storage, transport, and distribution, In: Yutaka Takahasi (ed) Encyclopedia of life support systems (EOLSS), Developed under the Auspices of the UNESCO, vol 1, Eolss Publishers, Oxford, p 486, http://www.eolss.net, ISBN 978-1-84826-176-1 (eBook)
- Sumi T, Okano M, Takata Y (2004) Reservoir sedimentation management with bypass tunnels in Japan. In: Proceedings of the ninth international symposium on river sedimentation, Yichang, China, 18–21 October 2004
- Tan Y, Yao F (2006) Three gorges project: Effects of resettlement on the environment in the reservoir area and countermeasures. Popul Environ 27:351–371
- Tremblay A, Varfalvy L, Roehm C, Garneau M (2005) Greenhouse gas emissions: fluxes and processes hydroelectric reservoirs and natural environments. Springer, New York
- Tullos D (2008) Assessing the influence of environmental impact assessments on science and police: An analysis of the Three Gorges Project. J Environ Manag 90:1–16

- UNEP (ed) (2000) Lakes and reservoirs: similarities, differences and importance. United Nations Environment Programme (UNEP IETC), Osaka
- Vörösmarty CJ, Michel M, Fekete B, Sharma K, Green P, Syvitski JP (2003) Antropogenic sediment retention: major global impact from registered river impoundments. Glob Planet Chang 39:169–190
- Walks DJ, Li HW, Reeves GH (2000) Trout, summer flows, and irrigation canals: a study of habitat condition and trout populations within a complex system. In: Cowx IG (ed) Management and ecology of river fisheries. Blackwell Science, London, pp 115–125
- Wang ZY, Chunhong HU (2009) Strategies for managing reservoir sedimentation. Int J Sediment Res 24:369–384
- WCD (2000) World commission on dams report: dams and development a new framework for decision-making. Earthscan Publications, London/Sterling
- White R (2001) Evacuation of sediments from reservoirs. Thomas Telford, London, 280
- White WR (2005) A review of current knowledge: world water storage in man-made reservoirs. FR/R0012. Foundation for Water Research, Marlow
- White WR (2010) World water: resources, usage and the role of man-made reservoirs. Foundation for Water Research, Marlow
- Wildi W (2010) Environmental hazards of dams and reservoirs. Curriculum in Natural Environmental Science, Terre et Environment, 88:187–197
- WWAP (World Water Assessment Programme) (2012) The United Nations World Water Foundation for water research development report 4: managing water under uncertainty and risk. UNESCO, Paris
- Yang TC (2006) Sustainable development and use of reservoirs. In: Erosion and sedimentation manual. U.S. Department of the Interior Bureau of Reclamation Technical Service Center Sedimentation and River Hydraulics Group, Denver